



MINI VAULT DOOR & NEW CLASS 1 SERIES



PRIVACY • SECURITY • ASSET



STRENGTH




CUSTOMER SERVICE



WORLD CLASS

SPECIFICATIONS

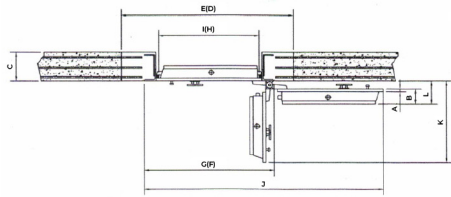

Ref	Specifications (mm)	Mini Vault Door	New Class 1
A	Barrier Material Thickness	12	25.4
B	Overall Door Thickness	135	149
C	Recommended Wall Thickness	200	200
(D)	Wall Opening Required - Height	2,300	2,300
E	Wall Opening Required - Width	1,200	1,200
(F)	Overall Height of Frame	2,032	2,070
G	Overall Width of Frame	1,090	1,140
(H)	Clear Opening - Height	1,900	1,900
I	Clear Opening - Width	850	850
J	Overall Width When Door Open at 180 Degree	1,959	2,000
K	Projection When Door Open at 90 Degree	967	977
L	Projection When Door Open at 180 Degree	207	220
	Moving Bolts / Bolt Diameter 38 mm	7 Sets	7 Sets
	Fixed Bolts / Bolt Diameter 38 mm	5 Sets	5 Sets
	Weight +/- 10%	350 kg	550 kg

QUALIFICATIONS



SSI (Structural Steel Integration)

Crafted from reinforced thick steel and seamlessly welded, boasts a strong unified structure that is highly resistant to forced entry and nearly indestructible.



XLarge Bolts

Equipped with 38 mm diameter bolts and rust-resistant coating, these locks strengthen the door panel and protect against prying and cutting, enhancing security.



CS350 Barrier Material

The CS350-infused material boasts fire resistance, anti-drill strength, and extra thickness for superior protection against heat, impact, and fire.



Multi Protection Door

The Mini Vault Door, features a 12mm thick steel front plate, with an overall door thickness of 135 mm.

New Class 1, features a 25.4 mm thick steel front plate, with an overall door thickness of 149 mm.

Constructed with special-grade steel, drill-resistant plate, and safety glass for secure locking areas.



Grille Gate and Ventilator

The Grille Gate has a dual-position key lock mechanism for increased security in daily use.

The Ventilator ensures proper air circulation in the secure room and also serves as an emergency system for communication and food delivery channel.



S&G Combination Lock

The UL-certified S&G combination locks feature a 3-digit code with over 100 million possible combinations and include a combination ring to deter code theft.



8 Lever Key Lock

This lock has an 8-lever, double-bit system and comes with a durable, hard-to-copy metal key, increasing security against counterfeiting.



Automatic Relock System

The safe has an automatic relock system with safety glass and a solid code mechanism to prevent tampering, ensuring reliable security.



Drill Protection Alloy Steel

With a puncture-resistant steel plate made from a custom alloy, it protects the key code mechanism, keys, and all points.



High Quality Paint

The door has been polished and treated for rust prevention before being painted in an automotive oven to ensure a long-lasting and shiny finish.

